



**CLIMBING CONCRETE
PLACING BOOMS**

M
Series

M 21
M 24
M 26
M 29
M 32



Optimum Design

Optimum design hydraulic placing booms are made of **High Strength Steel** which provides long life, light weight and practical use. Distribution area / weight – feet clearance rates are unbeatable. Optimization in the design is to maximize the practicability. Therefore the users describe the equipment as “site friendly equipment”.

TWIN DRIVE enables users to alter the power source. In case of electric cut-off concrete placing can continue without interruptions and short term works can be finished practically. Cost, time and performance gain is achieved at serious levels in construction sites.


BOOM CONSTRUCTION

Produced from special quality steel with high strength, flexibility and suitability for welding. It is light, strong and long durability...


SPLIT FRAME (Detachable Boom Unit)

Simplified split system makes it possible to detach the boom unit easily. When the crane capacity is limited the detachable boom and chassis can be lifted and moved separately.


M 21, M 24, M 26 / Technical Details

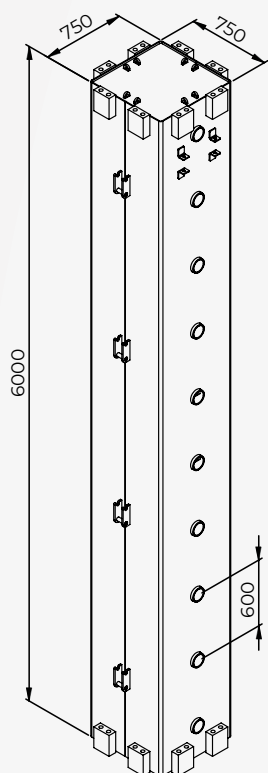


M 21 - M 24 - M 26
2200 kg
X 3 Nos.

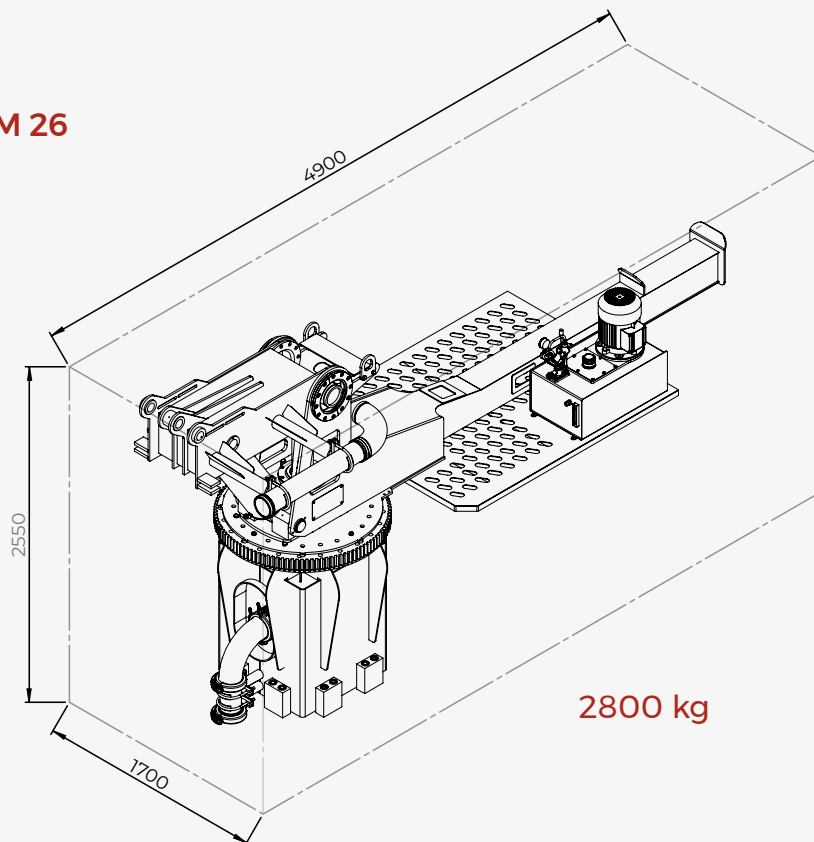

2800 kg








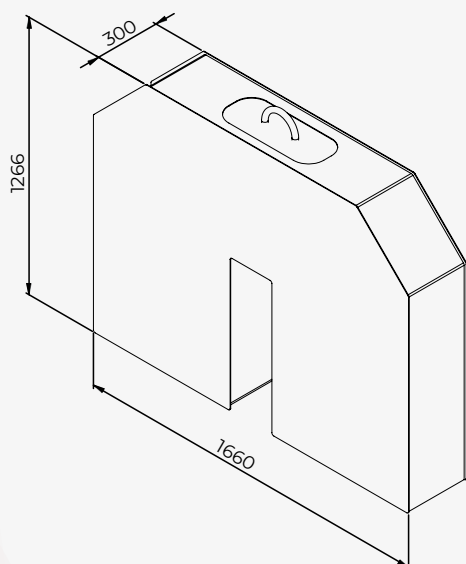


M 21 - M 24 - M 26
1250 kg
X 2 Nos.

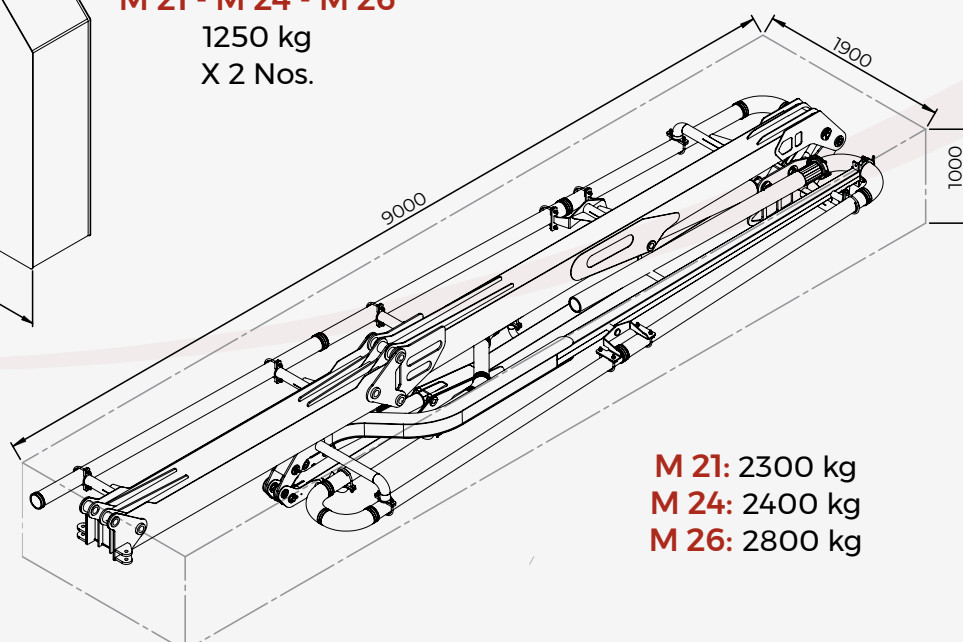


M 21: 2300 kg
M 24: 2400 kg
M 26: 2800 kg


M 21, M 24, M 26 / Technical Details

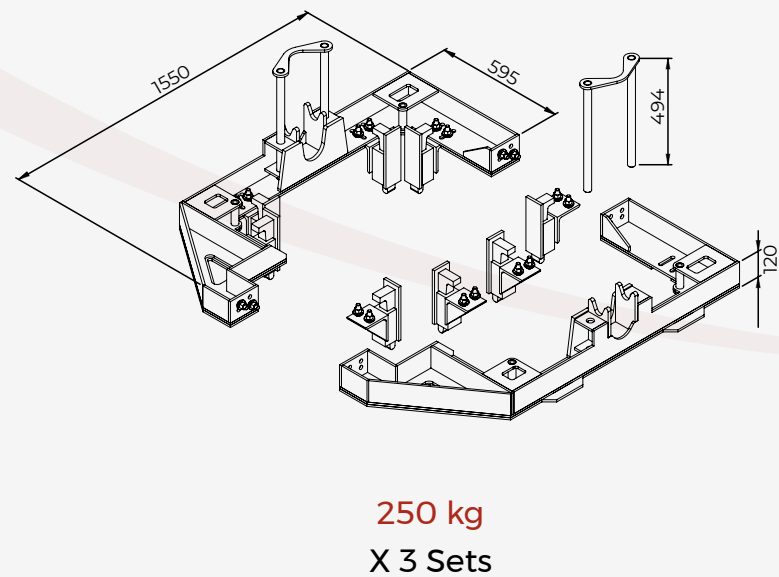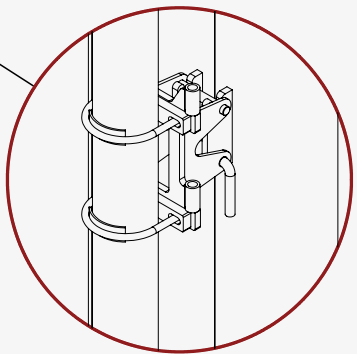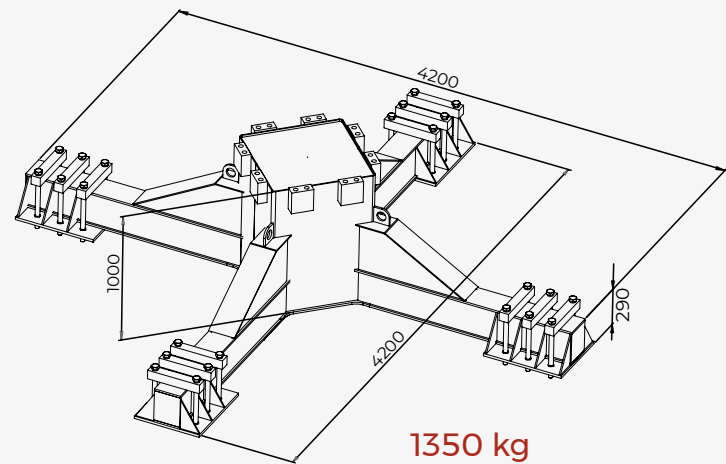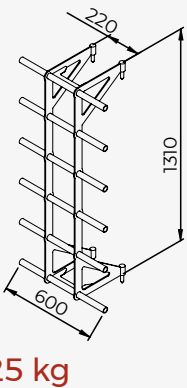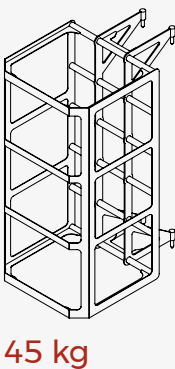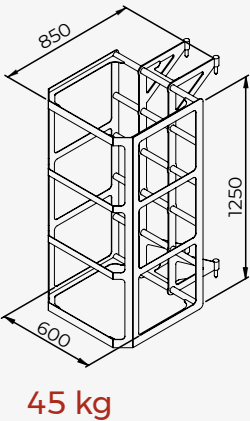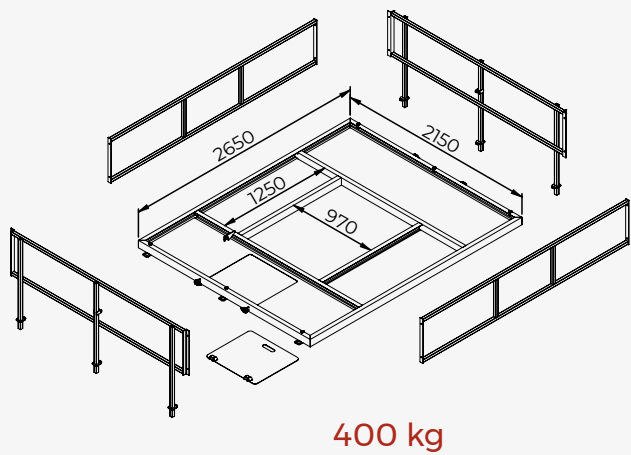


13 kg
X 12 Nos

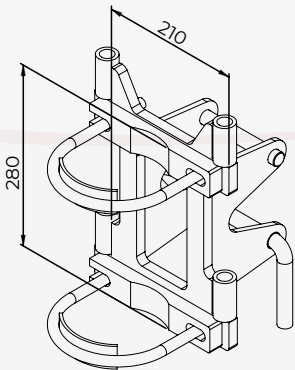

M 21, M 24, M 26 / Technical Details

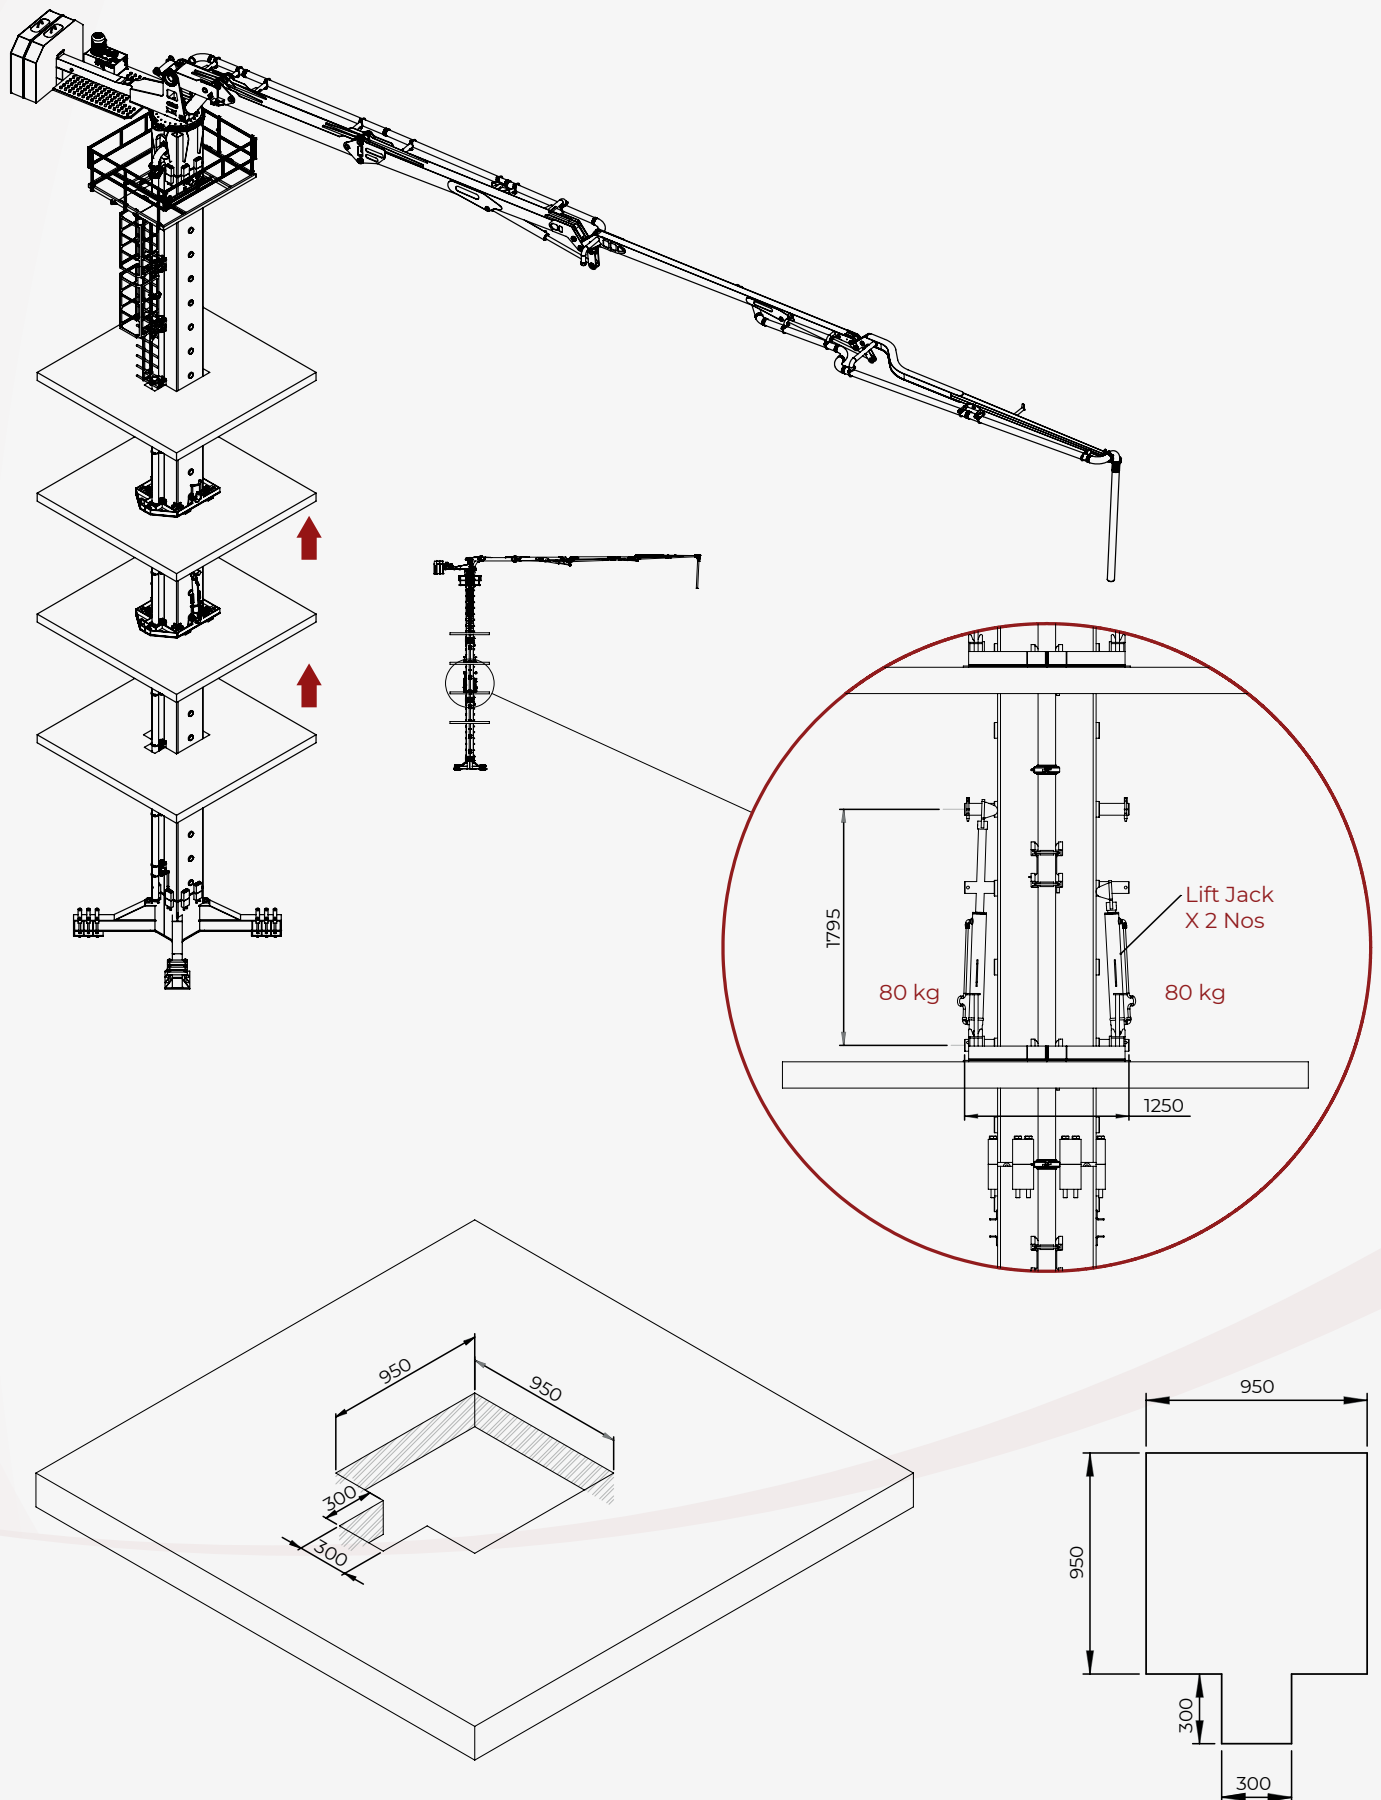


M 29, M 32 / Technical Details



POWER-PACK UNIT – Length: 2.3 m

M 29: 500 kg


M 32: 600 kg



MAIN FRAME & SLEW GEAR UNIT – Length: 4.5 m

M 29: 3900 kg


M 32: 4400 kg

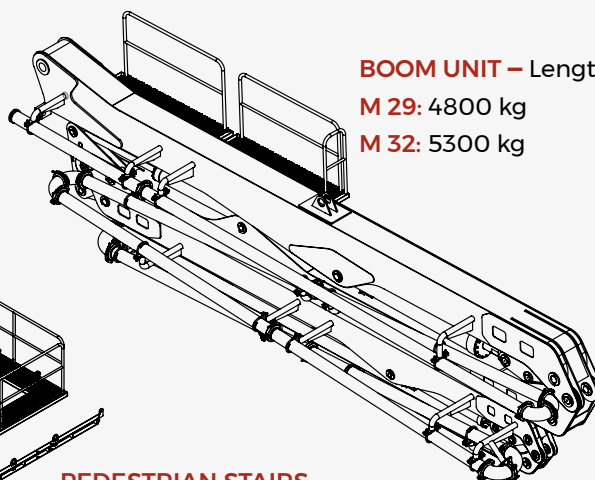

BOOM UNIT – Length: 8.2 m


M 29: 4800 kg

M 32: 5300 kg

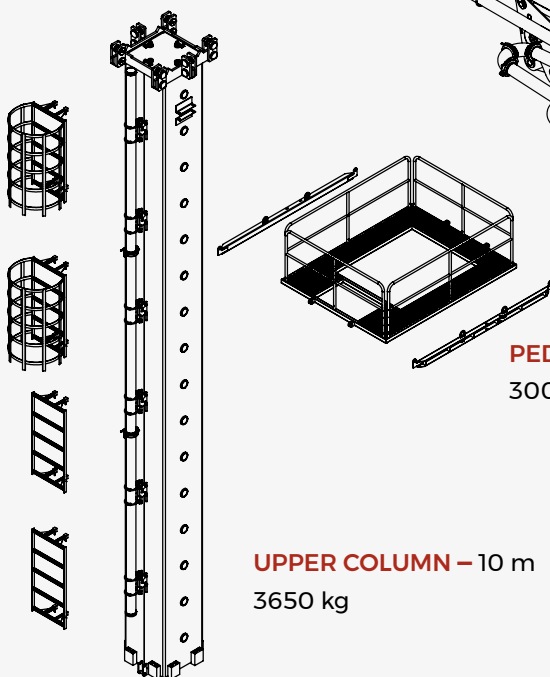


PEDESTRIAN STAIRS

300 kg



**FRAME
CONNECTION UNIT
&
ACCESSORIES**

450 kg




UPPER COLUMN – 10 m

3650 kg

LOWER COLUMN – 6 m

2150 kg




**GROUND CONNECTION
UNIT** – 1.5 m

1500 kg





**Atabey; Common language of concrete
placer's in more than 70 countries**

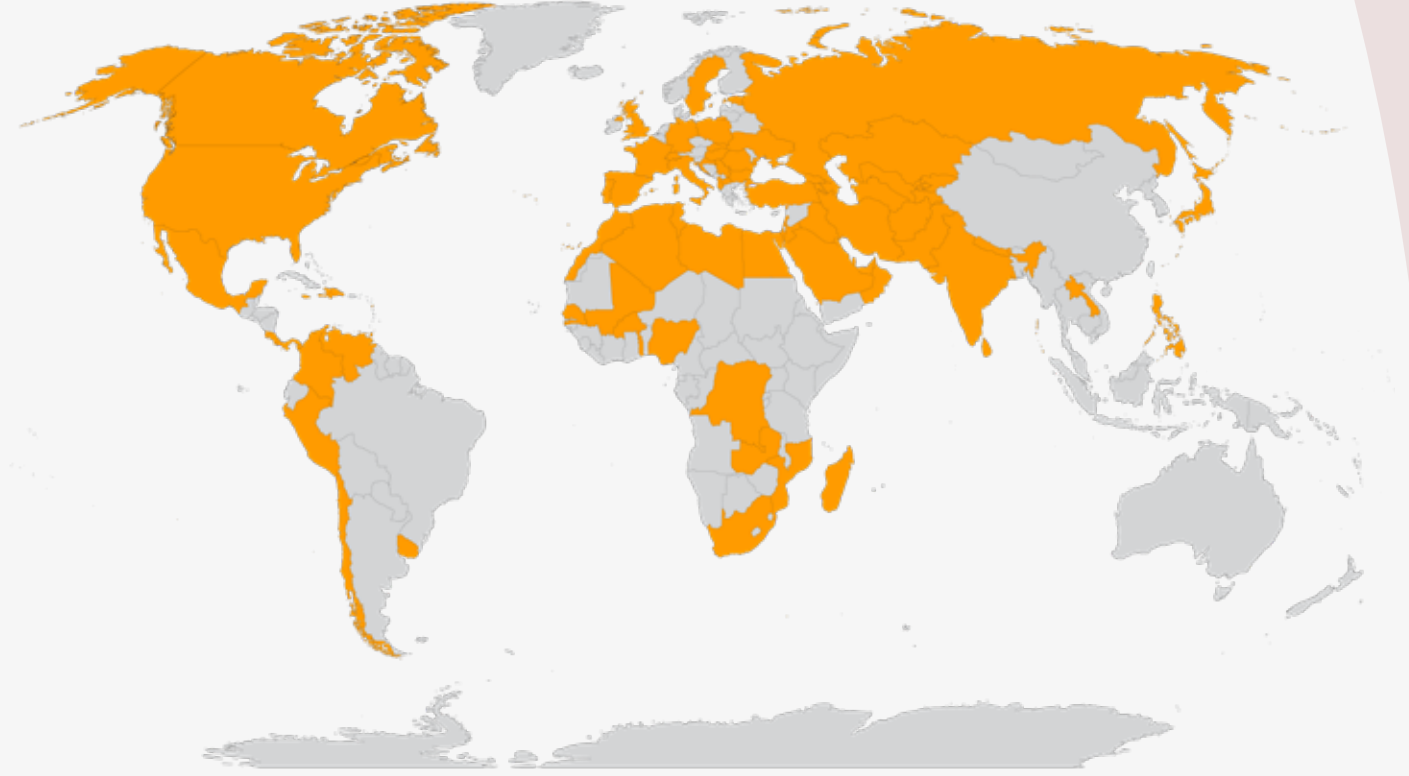

/AtabeyBetonMakinalari



/atabeyconstructionequipment



atabey construction equipment

YOUR DEALER:



NWN TECHNIK ENGINEERING
info@nwntechnik.de www.nwntechnik.de



ATABEY CONSTRUCTION EQUIPMENT

Address: Keresteciler San. Sit. 4. Cad. No: 39 Kahramankazan / Ankara - TURKEY

Phone: +90 312 441 11 33 Fax: +90 312 441 58 88

www.atabeymakina.com